

TUNNEL 50 DIGIT INOX

VERSION OF TUNNEL 50 DIGIT IN STAINLESS STEEL - IDEAL FOR PHARMACEUTICAL AND FOOD SECTOR



DESCRIPTION

TUNNEL 50 and 70 are **shrink tunnels** equipped with a series of technical and aesthetic updates designed to provide versatile, yet effective responses to all shrink wrapping needs.

TUNNEL 50 INOX is entirely made of stainless steel, ideal for the needs of the food and




pharmaceutical sector.

TECHNICAL FEATURES


Electrical power supply	200V 50/60Hz 3Ph 208V 60Hz 3Ph 220V 50/60Hz 3Ph 400V 50/60Hz 3Ph
MAX power installed	7,0 kW (200V) 7,5 kW (208V) 7,2 kW (220V) 7,2 kW (400V)
Maximum current	20 A (200V) 21 A (208V) 19 A (220V) 11 A (400V)
MAX product size	400x220 mm x L. (The maximum length depends on the shape, conveyor belt speed and type of film, etc.)
Machine dimensions	1770x840x1465 mm
Machine weight (Net/Gross)	188/236 kg
Tunnel infeed dimensions	450x240 mm

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING





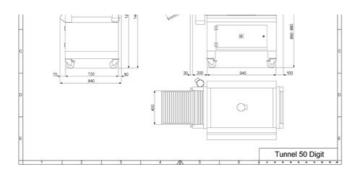

TECHNICAL FEATURES

- Manual belt height adjustment
- o Digital display with 9 programs that can be selected and customised
- o Option of selecting the auto-rotating feature for the rollers
- Product conveyor
- o Adjustable double air baffles
- Auto-off program
- Outfeed roller conveyor provided as standard.